



Wiper Colour Options

Access 6000



Shadow Copper Spruce Galaxy



Indigo Storm Nickel Nightfall


Base Colour Options




Black

Grey

Access 5000



Corncrake Kestrel Mallard Finch Kingfisher



Cuckoo Moorhen Falcon Jackdaw

GRADUS

Gradus Accessories Park Green Macclesfield Cheshire SK11 7LZ UK Tel: 01625 428922

For enquiries outside the UK and Eire contact Gradus International on +44 (0)1625 613780

www.gradus.com

Access[®] 6000 & 5000 | Modular Barrier Matting



GRADUS

Access[®] 6000 & 5000

A modular barrier matting system that is quick and easy to install.

✓ Quick & easy to install

- Easy to cut & trim on-site
- For use in matwells or can be surface mounted

✓ Ideal for use in many applications

- Offices, schools & high street shops†
- Suitable for light trolley traffic*
- Ideal for use where electronic tagging systems operate

✓ 5 day manufacturing service

- Available on all orders up to 20m² (T&Cs apply, call Technical Support for details)


✓ 7 year warranty**

† Smaller mat areas. Suitable for foot traffic of up to 5,000 crossings per day.

* Suitable for trolleys up to 200kg. Based on a test using a 4 wheeled trolley (50kg per wheel) with 150x45mm hard rubber wheels for 30,000 passes.

** 7 year manufacturing defects warranty. Warranty is subject to type of application, installation and on-going cleaning and maintenance being in accordance with Gradus recommendations.

All Gradus Accessories warranties are subject to Gradus Accessories terms & conditions of sale which can be found at www.gradus.com

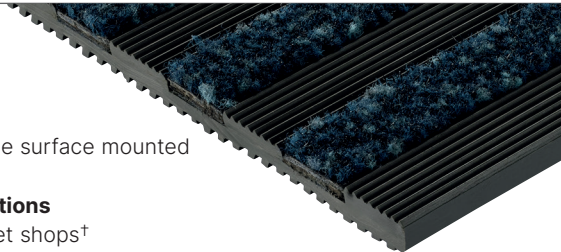


Product Information

- Supplied in 0.5m x 2m modules and supplied oversized for shaping and trimming on-site
- Supplied with spacer strips to allow for minor movement and to provide a neat finish
- Constructed from Econyl[®] regenerated solution dyed nylon wipers and a moulded rubber base
- Rubber base is available in either black or grey
- Closed construction
- Available in 12mm and 17mm thickness
- Suitable for interior use
- Slip resistance (HSL ramp test) – low risk of slip
- Flammability BS 4790:1987 – rated low fire risk


Profiles:
Dimensions shown are nominal.
Illustrations are 70% size in mm.
Products subject to minor design
alterations without notice.

Dimensions

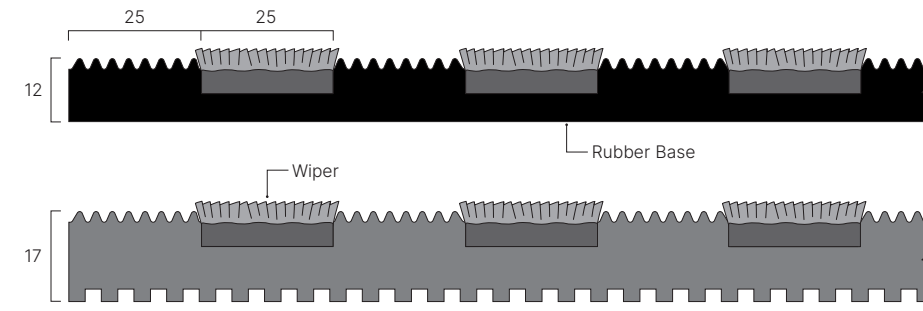


Accessories

For use with 12mm mat

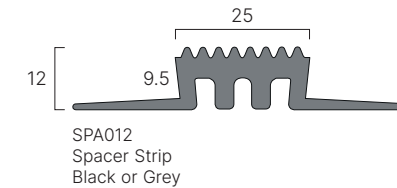

For use with 17mm mat

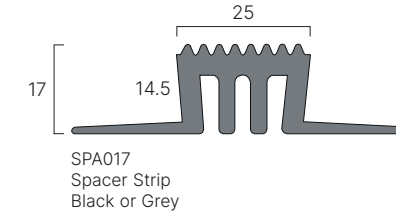


Accessories also available separately if required.

Profiles:
Dimensions shown are nominal.
Illustrations are 70% size in mm.
Products subject to minor design
alterations without notice.

Typical Installation

Shown recessed in a matwell

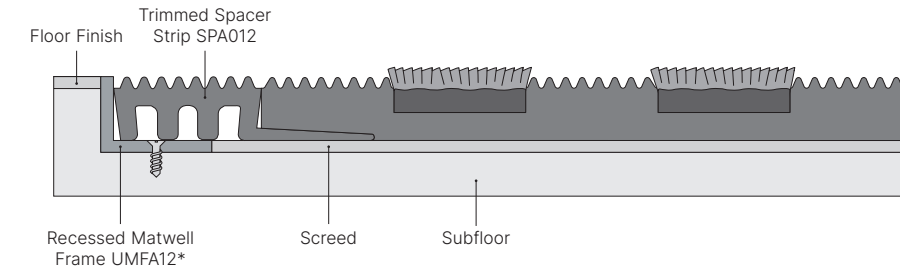

Note: 12mm thickness can be surface mounted using RAM012 ramping frame.

*see www.gradus.com for more information