


Installation Instructions


Stainless Steel Wall Guard - SSWGC1


Data Sheet: Page 1 of 2 CD/PH January 2018


SSWGC1


- 1. Cut the top retainer section to the length of the Stainless Steel Wall Guard cover minus 30mm at each end to prevent impingement with any end caps. Drill the retainer with Ø6mm holes along the central v-notch at a distance 20mm from each end and at regular intervals of between 600mm and 900mm depending upon the substrate. Similarly, for the bottom 'L' retainer section, cut it to the same length as the top retainer with the same size holes and spacings ensuring that the holes are all centred 12mm from the top edge of the long leg of the 'L'-shaped section.
- 2. Using a laser level, establish the line indicating where the top of the wall guard will sit against the wall (A).
- From that line measure down 40mm and mark out the line on the wall (B). From that line, measure down a further 95mm and mark out another line (C).












7. Once the cover is in position, use the supplied no.8 pan head self-tappers to fasten through the holes in the base of the wall guard and into the bottom retainer section.

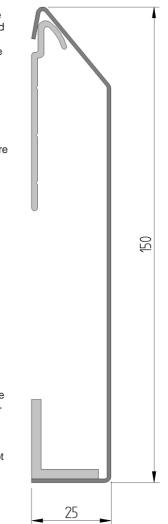

GRADUS

Installation Instructions

Stainless Steel Wall Guard - SSWGC1

Data Sheet: Page 2 of 2 CD/PH January 2018

